



JOSAM CV-Aligner

Commercial vehicle wheel alignment
with camera technology





JOSAM CV-Aligner

Heavy vehicle alignment with camera technology

This compact wheel alignment system enables truck and bus workshops, as well as tire service centers, to offer wheel alignment services quickly and accurately.

Wheel angles like

- **toe, steering box position, camber, out of square, parallelism and axle offset**
- **caster, KPI, Toe Out On Turns and max turn**

are measured using our patented camera technology with the chassis center line of the vehicle as reference.

Enabled by the unique rolling method, toe and camber measurements may be taken while the vehicle is in driving position. No lifting of the axles with run-out compensation is required, alternatively the system can also be operated with standard run-out procedure.

Wireless technology is used for transmitting data between measuring units and the computer. The computer software guides the user through the measuring process and prints out measurement reports of values, before and after alignment.


Wireless communication between the camera and the PC software.



Why wheel alignment?

By measuring and adjusting wheel angles on a vehicle, fuel costs and tire wear are reduced. At the same time comfort, security and running characteristics are improved. This leads to a better economy and environment for everyone. It also means that the vehicle travels on the highway without taking up as much space as an incorrectly aligned vehicle would.

Measurement principle

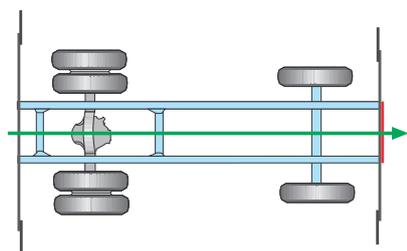

The JOSAM CV-Aligner wheel alignment system uses the centerline principle to determine the position of axles and individual wheels in relation to the centerline of the vehicle.

The system is designed to measure commercial vehicles such as trucks, trailers, buses and light commercial vehicles.

Measuring caster, KPI and turnangles

This measurement is based on a single continuous movement of the wheels, from a straight ahead position to maximum left, via maximum right and back to the starting position.

During this procedure the built-in gyroscope and inclinometer are constantly transmitting data to the computer, which calculates the caster, KPI and turn angles in different wheel positions. The entire process can be carried out in a matter of minutes.




The rolling method

The measuring is carried out as the vehicle stands on the floor, followed by rolling the vehicle so that the wheels turn half a turn and the cameras automatically take the readings.

This method allows the camera system to measure before, during and after rolling, without the need for any run-out compensation. Toe and camber values will be displayed automatically and adjustments can be made if needed.

The axle offset value together with out of square is also presented as a result of the measurement.

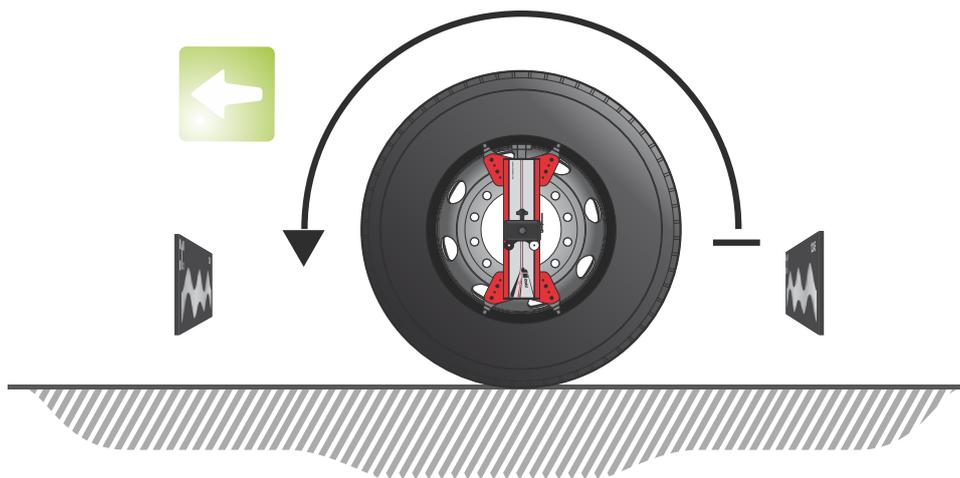

Authorized Dealer



133, Hindustan Kohinoor Indl. Complex,
LBS Marg, Vikhroli (W), MUMBAI- 400 083
Tel: +91-22-2577-7295/6799 7858 ▪ +91-22-6799-7859
Email : info@tribotechindia.com
services@tribotechindia.com
Website : www.tribotechindia.com

Manufacturer:



JOSAM[®]

Box 419 ▪ SE-701 48 ÖREBRO ▪ Sweden
Tel.: +46 19 30 40 00 ▪ Fax +46 19 32 03 16
E-mail: info@josam.se ▪ Internet: www.josam.se